

\~15~

DERWENT-ACC-NO: 1998-120847

DERWENT-WEEK: 200129

COPYRIGHT 2006 DERWENT INFORMATION LTD

TITLE: External insulated wall construction for
residential buildings - has inner and outer wallboarded and
clad skins enclosing cardboard lined cavity filled
with sawdust or other organic material

INVENTOR: DUVENHILL, P

PATENT-ASSIGNEE: PD BYGG & SNICKERI AB[PDBYN]

PRIORITY-DATA: 1996SE-0002804 (July 18, 1996)

PATENT-FAMILY:

PUB-NO	PUB-DATE	LANGUAGE
PAGES MAIN-IPC		
WO 9803745 A1	January 29, 1998	E
008 E04B 002/70		
DE 69704275 E	April 19, 2001	N/A
000 E04B 002/70		
AU 9737142 A	February 10, 1998	N/A
000 E04B 002/70		
EP 912807 A1	May 6, 1999	E
000 E04B 002/70		
EP 912807 B1	March 14, 2001	E
000 E04B 002/70		

DESIGNATED-STATES: AL AM AT AU AZ BA BB BG BR BY CA CH CN CU CZ DE DK
EE ES FI
GB GE HU IL IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MD MG MK MN MW
MX NO NZ
PL PT RO RU SD SE SG SI SK TJ TM TR TT UA UG US UZ VN AT BE CH DE DK
EA ES FI
FR GB GH GR IE IT KE LS LU MC MW NL OA PT SD SE SZ UG ZW AT BE CH DE
DK FI LI
NL SE AT BE CH DE DK FI LI NL SE

APPLICATION-DATA:

PUB-NO	APPL-DESCRIPTOR	APPL-NO
--------	-----------------	---------

APPL-DATE		
WO 9803745A1	N/A	1997WO-SE01294
July 18, 1997		
DE 69704275E	N/A	1997DE-0604275
July 18, 1997		
DE 69704275E	N/A	1997EP-0933971
July 18, 1997		
DE 69704275E	N/A	1997WO-SE01294
July 18, 1997		
DE 69704275E	Based on	EP 912807
N/A		
DE 69704275E	Based on	WO 9803745
N/A		
AU 9737142A	N/A	1997AU-0037142
July 18, 1997		
AU 9737142A	Based on	WO 9803745
N/A		
EP 912807A1	N/A	1997EP-0933971
July 18, 1997		
EP 912807A1	N/A	1997WO-SE01294
July 18, 1997		
EP 912807A1	Based on	WO 9803745
N/A		
EP 912807B1	N/A	1997EP-0933971
July 18, 1997		
EP 912807B1	N/A	1997WO-SE01294
July 18, 1997		
EP 912807B1	Based on	WO 9803745
N/A		

INT-CL (IPC): E04B002/70

ABSTRACTED-PUB-NO: EP 912807B

BASIC-ABSTRACT:

The outer leaf (1) of the wall comprises a structural weather cladding (10) fixed to horizontal battens (12) planted on gypsum wallboard (11) lined with a layer of ventilating cardboard (5). The inner leaf (3) comprises wallboard (13) on vertical battens (14) fixed to plywood (15), which is also lined with cardboard (6).

The cardboard-lined cavity (2) thus formed is spaced by frames having vertical members (7,8) and spaced cross members (9). The cavity (2) is filled

with
sawdust or other organic insulating material capable of absorbing and
losing
moisture without loss of its insulating property.

ADVANTAGE - The cavity insulation allows the absorption and drying
out of
moisture and condensation. Prevents the formation of mould causing
unhealthy
and unpleasant indoor air environmental conditions.

ABSTRACTED-PUB-NO: WO 9803745A

EQUIVALENT-ABSTRACTS:

The outer leaf (1) of the wall comprises a structural weather
cladding (10)
fixed to horizontal battens (12) planted on gypsum wallboard (11)
lined with a
layer of ventilating cardboard (5). The inner leaf (3) comprises
wallboard
(13) on vertical battens (14) fixed to plywood (15), which is also
lined with
cardboard (6).

The cardboard-lined cavity (2) thus formed is spaced by frames having
vertical
members (7,8) and spaced cross members (9). The cavity (2) is filled
with
sawdust or other organic insulating material capable of absorbing and
losing
moisture without loss of its insulating property.

ADVANTAGE - The cavity insulation allows the absorption and drying
out of
moisture and condensation. Prevents the formation of mould causing
unhealthy
and unpleasant indoor air environmental conditions.

CHOSEN-DRAWING: Dwg.1/1

TITLE-TERMS: EXTERNAL INSULATE WALL CONSTRUCTION RESIDENCE BUILD
INNER OUTER

CLAD SKIN ENCLOSE CARDBOARD LINING CAVITY FILLED SAWDUST
ORGANIC
MATERIAL

DERWENT-CLASS: Q43

SECONDARY-ACC-NO:


Non-CPI Secondary Accession Numbers: N1998-096018



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E04B 2/70		A1	(11) International Publication Number: WO 98/03745
			(43) International Publication Date: 29 January 1998 (29.01.98)
(21) International Application Number: PCT/SE97/01294		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 18 July 1997 (18.07.97)			
(30) Priority Data: 9602804-8 18 July 1996 (18.07.96) SE			
(71) Applicant (for all designated States except US): PD BYGG & SNICKERI AB [SE/SE]; Remsle 322, S-881 00 Sollefteå (SE).			
(72) Inventor; and			
(75) Inventor/Applicant (for US only): DUVENHILL, Per [SE/SE]; Remsle 322, S-881 50 Sollefteå (SE).			
(74) Agents: ONN, Thorsten et al.; AB Stockholms Patentbyrå, Zacco & Bruhn, P.O. Box 23101, S-104 35 Stockholm (SE).		Published With international search report. In English translation (filed in Swedish).	

(54) Title: WALL CONSTRUCTION

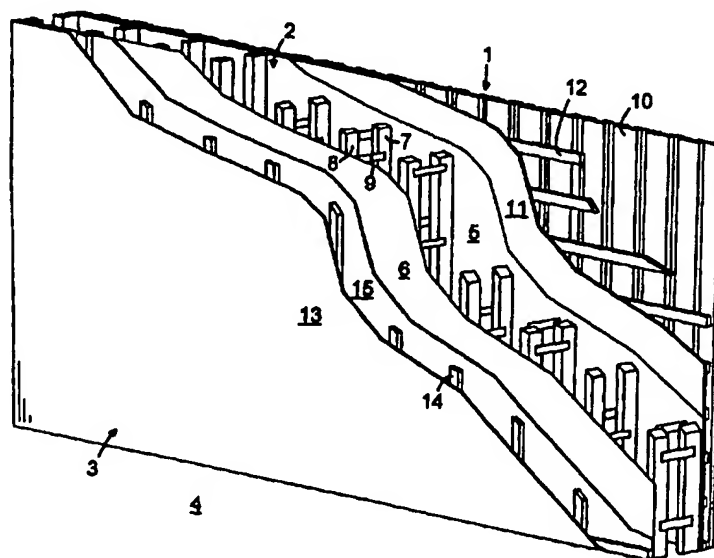

(57) Abstract

This invention relates to an outer wall, intended for buildings, preferably dwelling houses, the wall comprising an outer portion, an intermediate portion comprising insulating material and an inner portion. According to the invention the outer wall is characterized in that the intermediate portion (2) on that part, which is directed to the outer portion (1) and on that part, which is directed to the inner portion (3), has a cardboard material (5, 6), which is made in such a way that it can allow air to pass through, and that the insulating material comprises an organic material, preferably sawdust or the like, with the quality to be able to receive and emit moisture while maintaining its insulating ability.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WALL CONSTRUCTION

This invention relates to an outer wall intended for buildings, preferably dwelling houses, the wall comprising an outer portion, an intermediate portion comprising insulating material and an inner portion.

Outer walls in houses built in later time as a rule are constructed in that way that the
5 intermediate portion comprises an insulating layer of inorganic material, the layer having a plastic foil on its inside, which foil is impermeable to air.

Due to the great fluctuations of temperature that the outer wall and by that the insulating layer are exposed to, there arises moisture in the insulating layer, but since there cannot be any air permeation in the insulating layer, the moisture will not dry up but instead
10 mould is formed in the insulating layer, which of course means a bad air environment indoors and accordingly great problems for asthmatic or allergic persons. the number of which steadily grows in our society.

By the French patent document No. 2.554.847 is an outer wall previously known, which comprises an insulating layer of inorganic material, like for instance mineralwool. This
15 insulating material is impaired by the essential drawback that its insulating ability is strongly reduced in moisture, and this moisture is remained for a long time.

The known wall is very complicated regarding its construction and is different from that one according to this invention. The known wall construction has for instance a centrally positioned partition wall, which is impermeable to air and moisture.

20 This invention intends to eliminate the problems with known technique and provide a wall construction, which to a high extent improves the air environment indoors for persons having allergic, asthmatic and similar troubles. Due to this invention the fresh air environment existing in houses of old time is provided, but with the essential difference that the drawback with a draughty environment is eliminated.

25 According to this invention the new wall construction is characterized by the fact that the intermediate portion on that part, which is directed towards the outer portion, and on that part, which is directed towards the inner portion, has a cardboard material, which is made in such a way that it can allow air to pass through, and that the insulating material comprises an organic material, preferably sawdust or the like, with the quality to be able to receive and emit
30 moisture while maintaining its insulating ability.

A preferred embodiment of the outer wall shall be described more closely below with reference to the accompanying drawing, which shows a cutaway view of the wall.

The new outer wall comprises an outer portion 1, an intermediate portion 2 and an inner portion 3, which is intended to represent a wall in the room 4.

The intermediate portion 2 is delimited on its outer side as well as on its inside of a ventilating cardboard 5, 6, which are made in that way that they can allow air to pass through. The intermediate portion 2 further comprises outer, vertical beams 7 and inner vertical beams 8, which are held together by means of horizontal distance plates 9, whereby
5 there is a predetermined distance between the two cardboard layers 5, 6, which distance accordingly constitutes the width of the intermediate layer 2. The space, which accordingly exists between the two cardboard layers, is intended to be filled with an insulating material. According to this invention the insulating material comprises an organic material, preferably sawdust or wood fibre dust, and this material fills out the entire space between the two
10 ventilating cardboard layers 5, 6 and accordingly also the space between the two opposite beams 7, 8. The beam construction leads to that the sawdust/wood fibre dust can expand and shrink without creating air pockets between the inner- and the outer side of the intermediate portion 2.

The distance plates 9 are vertically displaced in relation to each other, which has the
15 consequence that the sawdust is allowed to move everywhere in the insulating intermediate layer. Due to that fact the risk is eliminated that cavities/air pockets shall be able to arise and by that a reduction of the insulating ability.

The insulating material has the ability to receive and emit moisture in connection with the air movements through the wall but still maintain its insulating ability. Due to the
20 mentioned air movement all tendencies to mould formation in the insulating material are eliminated, and therefore the indoor air becomes very tolerable for persons having allergic or asthmatic problems.

According to this invention the outer portion comprises a cover board 10, a gypsum wallboard 11 and intermediate, horizontal beams 12, which parts are fastened to each other in
25 a suitable way. When building up the wall, the outer cardboard layer 5 of the intermediate portion 2 is connected with the gypsum wallboard 11 of the outer portion 1.

The inner portion 3, according to this embodiment, comprises a gypsum wallboard 13, essentially vertical beams 14 and a wooden board 15 or the like. In this connection the wooden board 15 is fastened to the intermediate portion 2, whereas the gypsum wallboard 13
30 is suitably fastened on the beams 14 by nails, which beams in their turn are fastened on the wooden board 15.

Due to the existence of the beams 14 there is created a space between the gypsum wallboard 13 and the wooden board 15. In this space all electric installation shall be made, whereby no making of holes in the intermediate portion 2 needs to be done.


The new outer wall construction makes installation of different types of ventilation systems in the house possible.

The invention is of course not limited to the described embodiment but can be modified within the scope of the following claims. Thus, the outer portion 1 as well as the
5 inner portion 3 of the wall can be made in another way.

Claims

1. An outer wall, intended for buildings, preferably dwelling-houses, the wall comprising an outer portion, an intermediate portion comprising insulating material and an inner portion, c h a r a c t e r i z e d in that the intermediate portion (2) on that part, which is directed to the outer portion (1) and on that part, which is directed to the inner portion (3), has a cardboard material (5, 6), which is made in such away that it can allow air to pass through, and that the insulating material comprises an organic material, preferably sawdust or the like, with that quality to be able to receive and emit moisture while maintaining its insulating ability.
2. An outer wall according to claim 1, c h a r a c t e r i z e d in that the intermediate portion (2) comprises outer, vertical beams (7) and inner, vertical beams (8), which are held together by means of horizontal distance plates (9), whereby there is created a space between the two cardboard layers (5, 6), which are completely filled up by the insulating material, and that the mentioned distance plates are vertically displaced in relation to each other.
3. An outer wall according to claim 1 or 2, c h a r a c t e r i z e d in that the outer portion (1) comprises a cover board (10), an inner gypsum wallboard (11) and intermediate horizontal beams (12), which parts are fastened to each other in a suitable way.
4. An outer wall according to any one of the preceding claims, c h a r a c t e r i z e d in that the inner portion (3) comprises a gypsum wall board (13), a wooden board (15) and intermediate, vertical beams (14), which parts are fastened to each other in a suitable way.
-

1/1

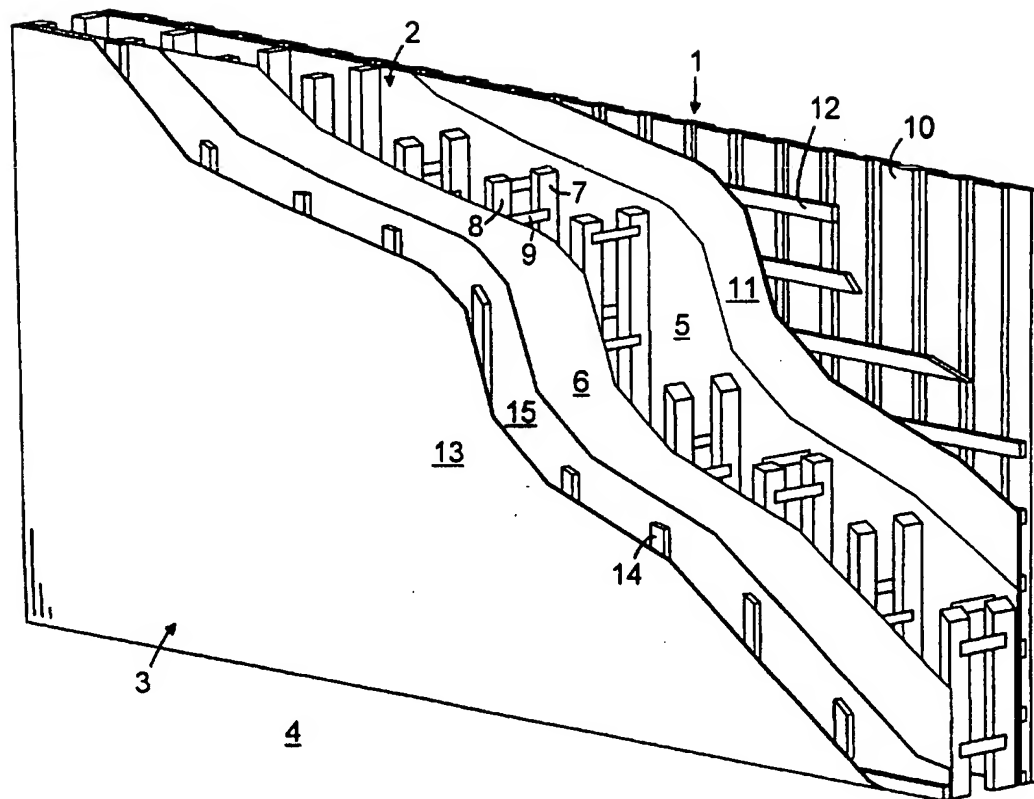

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01294

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: E04B 2/70 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: E04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	FR 2554847 A1 (BLANDING, M.M.R.A. ET AL), 17 May 1985 (17.05.85), page 4, line 11 - page 5, line 24, figure 1 --	1,3,4
Y	CH 189340 A (A. OTT), 1 June 1937 (01.06.37) --	1,3,4
A	CH 230228 A (BAUSTOFF AARAU AG), 16 March 1944 (16.03.44) --	1-4
A	BYGG, HANDBOK FÖR HUS-, VÄG- OCH VATTENBYGGNAD, BAND III Husbyggnad, Tidskriften Byggmästarens Förlag, STOCKHOLM 1951, Kap. 623:33, p. 562-564; Fig: 336 a) --	1-4
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
7 October 1907		10.11.97
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Ingemar Hedlund Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/09/97

International application No.
PCT/SE 97/01294

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
FR	2554847	A1	17/05/85	NONE	
CH	189340	A	01/06/37	NONE	
CH	230228	A	16/03/44	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)